

FEATURES :

- * Time-Lag Type
- * Radial Lead Micro Fuse
- * RoHS-Compliant Products


APPROVALS :

- * SEMKO [1-6.3A] * VDE [1-6.3A]
- * UL Recognized (US/Canada)
- * METI (PSE) [1-6.3A]
- * CQC [1-6.3A] * Korea Certification



SCT SERIES

DIMENSIONS :

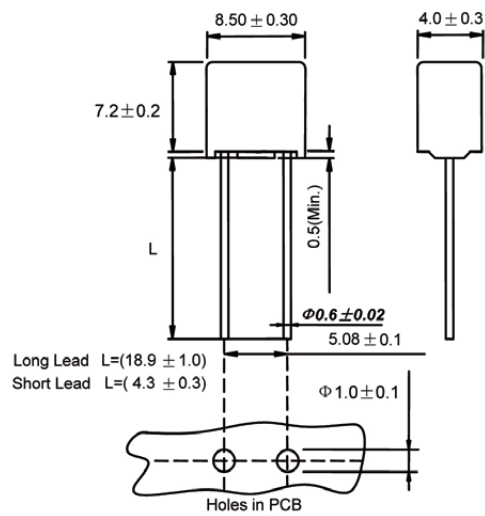


Unit : mm

ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time
150%	1 hours Min.
210%	120 sec Max.
275%	400m sec Min. / 10 sec Max.
400%	150m sec Min. / 3 sec Max.
1000%	20m sec Min. / 150m sec Max.

**AVERAGE TIME CURRENT CURVES
TYPICAL**

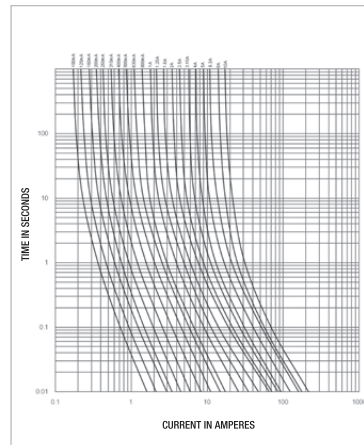

SPECIFICATIONS :

Product Code	Ampere Rating	Voltage Rating AC	Voltage Drop Max (mV)	Breaking Capacity		Typical Melting I ² t (A ² sec)
				IEC	METI	
SCT 100 mA	100 mA	250 V	350	35 A	100 A	0.02623
SCT 125 mA	125 mA	250 V	300	35 A	100 A	0.04499
SCT 160 mA	160 mA	250 V	280	35 A	100 A	0.08755
SCT 200 mA	200 mA	250 V	260	35 A	100 A	0.1181
SCT 250 mA	250 mA	250 V	240	35 A	100 A	0.2030
SCT 315 mA	315 mA	250 V	220	35 A	100 A	0.3597
SCT 400 mA	400 mA	250 V	200	35 A	100 A	0.6893
SCT 500 mA	500 mA	250 V	190	35 A	100 A	1.232
SCT 630 mA	630 mA	250 V	180	35 A	100 A	2.185
SCT 800 mA	800 mA	250 V	160	35 A	100 A	2.987
SCT 1 A	1 A	250 V	140	35 A	100 A	6.619
SCT 1.25 A	1.25 A	250 V	130	35 A	100 A	12.23
SCT 1.6 A	1.6 A	250 V	120	35 A	100 A	22.03
SCT 2 A	2 A	250 V	100	35 A	100 A	43.08
SCT 2.5 A	2.5 A	250 V	100	35 A	100 A	50.05
SCT 3.15 A	3.15 A	250 V	100	35 A	100 A	73.53
SCT 4 A	4 A	250 V	100	40 A	100 A	88.16
SCT 5 A	5 A	250 V	100	50 A	100 A	152.0
SCT 6.3 A	6.3 A	250 V	100	63 A	100 A	255.7