


EE CORES

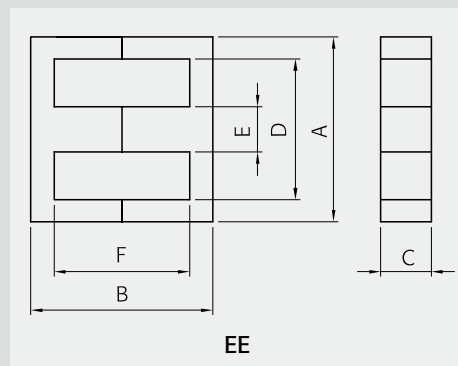

Part No.	EE0505S	EE0606S	EE0808S	EE0908S	
Type	EE	EE	EE	EE	
Dimensions in mm	A	5.25 ±0.20	6.10 ±0.20	8.30 ±0.20	8.90 ±0.30
	B	5.30 ±0.10	5.70 ±0.10	8.00 ±0.20	8.12 ±0.26
	C	1.95 ±0.10	1.95 ±0.10	3.60 ±0.20	1.90 ±0.13
	D	3.80 min.	3.70 ±0.10	6.35 ±0.20	5.30 ±0.30
	E	1.35 ±0.10	1.35 ±0.10	2.00 ±0.20	1.90 ±0.13
	F	4.00 ±0.10	3.80 ±0.15	6.00 ±0.20	4.32 ±0.26

Core Set Parameters	C1(mm ⁻¹)	4.846	3.697	2.732	3.140
	Le(mm)	12.6	12.2	19.4	15.7
	Ae(mm ²)	2.6	3.3	7.1	5.0
	Ve(mm ³)	33	40	139	78
	Ac(mm ²)	2.6	2.6	6.0	3.6
	Aw(mm ²)	5.0	4.5	14.0	7.3
	W(g/set)	0.2	0.3	0.7	0.5

Electrical Characteristics ⁽¹⁾⁽²⁾	AL value	PL-7	285	405	590	540
		PL-9	355	450	670	610
		PL-11	300	410	600	550
		PL-13	380	480	710	650
		PL-15	300	410	600	550
		SM-23T	270	390	570	520
		SM-43T	500	520	770	700
		SM-50	580	600	900	810
		SM-60	700	720	1080	970
		SM-70S	870	900	1100	1000
	SM-100	1000	1000	1200	1100	
	Core loss	PL-7	0.018	0.022	0.076	0.050
		PL-9	0.017	0.020	0.070	0.040
		PL-11	0.017	0.020	0.070	0.040
		PL-13	0.016	0.019	0.067	0.040
		PL-15	0.015	0.018	0.063	0.037

Note : 1) Core Loss

- Unit : Watt max.
- Measuring conditions
- PL-7, PL-11, PL-15 : 100kHz, 200mT, at 100°C
- PL-9, PL-13 : 100kHz, 200mT, at 80°C
- ¹⁾ 100kHz, 100mT, at 100°C
- ²⁾ 25kHz, 200mT, at 100°C

2) AL value



- Unit : nH/N²
- Measuring conditions : 1kHz, 0.1V, 23°C
- Tolerance : ±25%
- SM-100 : Non mirror grinding

	EE1010S	EE1011S	EE1312S	EE1313S	EE1614S	EE1614SC	EE1616A	EE1616S	EE1625S
Type	EE	EE	EE	EE	EE	EE	EE	EE	EE
A	10.30 ±0.20	10.30 ±0.20	13.00 ±0.30	12.60 ^{+0.50} / _{-0.40}	16.00 ±0.30	16.00 ±0.30	16.30 ±0.30	16.10 ±0.60	16.00 ±0.40
B	10.20 ±0.20	11.05 ±0.25	12.00 ±0.30	13.00 ^{+0.00} / _{-0.40}	14.20 ^{+0.40} / _{-0.00}	14.20 ^{+0.40} / _{-0.00}	8.40 ±0.15	16.10 ±0.30	24.50 ±0.40
C	2.80 ±0.20	4.75 ±0.15	5.90 ±0.20	3.70 ^{+0.00} / _{-0.30}	5.00 ^{+0.40} / _{-0.00}	6.90 ±0.20	4.50 ±0.20	4.50 ±0.20	5.10 ^{+0.00} / _{-0.40}
D	7.90 ±0.20	7.90 ±0.20	10.20 ±0.20	8.90 ^{+0.60} / _{-0.00}	12.00 ±0.30	12.00 ±0.30	11.50 min.	11.30 min.	12.00 ±0.30
E	2.30 ±0.20	2.40 ±0.20	3.18 ±0.10	3.70 ^{+0.00} / _{-0.30}	4.00 ^{+0.40} / _{-0.00}	4.00 ^{+0.00} / _{-4.00}	4.55 ±0.15	4.55 ±0.15	4.20 ^{+0.00} / _{-0.40}
F	7.90 ±0.20	8.65 ±0.25	5.75 ±0.20	9.00 ^{+0.60} / _{-0.00}	10.40 ^{+0.50} / _{-0.00}	10.40 ^{+0.50} / _{-0.00}	6.25 ±0.20	11.80 ±0.40	20.40 ±0.40

C1(mm ⁻¹)	3.846	2.333	1.894	2.395	1.929	1.335	1.950	1.875	2.816
Le(mm)	25.0	26.6	30.3	29.7	35.5	35.5	39.2	37.7	55.2
Ae(mm ²)	6.5	11.4	16.0	12.4	18.4	26.6	20.1	20.1	19.6
Ve(mm ³)	163	302	487	369	655	944	788	755	1080
Ac(mm ²)	6.4	11.4	15.3	12.6	18.2	26.2	20.4	20.4	19.6
Aw(mm ²)	22.1	23.7	34.9	26.2	43.6	43.6	45.3	43.3	81.5
W(g/set)	1.9	1.5	2.4	1.9	3.2	4.6	3.9	3.8	5.3

Electrical Characteristics ⁽¹⁾⁽²⁾	AL value	PL-7	430	810	1000	810	1100	1500	1000	1000	750
		PL-9	480	940	1200	940	1370	1880	1250	1300	900
		PL-11	440	800	1000	800	1200	1560	1040	1200	800
		PL-13	510	1000	1280	100	1460	2000	1300	1390	960
		PL-15	440	800	1000	800	1200	1560	1040	1200	800
		SM-23T	410	780	960	780	1050	1440	960	960	720
		SM-43T	650	1200	1510	1160	1680	2670	1810	1720	1330
		SM-50	750	1400	1750	1350	1950	3100	2100	2000	1550
		SM-60	900	1680	2100	1620	2280	3700	2500	2400	1860
		SM-70S	1000	1750	2200	1700	2300	4600	3100	2600	1900
	SM-100	1100	1900	2400	1900	2500	5100	3400	2900	2100	
	Core loss	PL-7	0.090	0.17	0.27	0.20	0.36	0.52	0.43	0.42	0.59
		PL-9	0.082	0.15	0.24	0.18	0.33	0.47	0.39	0.38	0.54
		PL-11	0.082	0.15	0.24	0.18	0.33	0.47	0.39	0.38	0.54
		PL-13	0.078	0.14	0.23	0.18	0.31	0.45	0.38	0.36	0.52
		PL-15	0.073	0.14	0.22	0.17	0.29	0.42	0.35	0.34	0.49

EE CORES

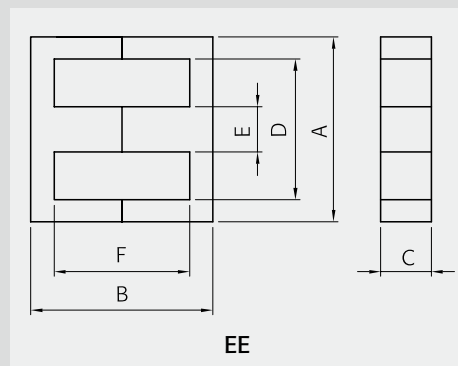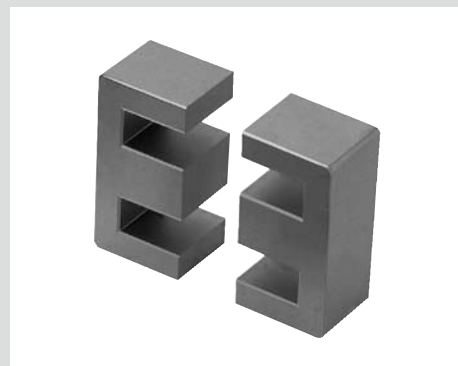

Part No.	EE1916B	EE1916S	EE1927S	EE2017S	
Type	EE	EE	EE	EE	
Dimensions in mm	A	19.00 ±0.30	19.00 ±0.30	19.00 ±0.30	20.30 ±0.40
	B	15.90 ±0.40	16.10 ±0.40	27.30 ±0.50	16.80 ±0.40
	C	5.10 ^{+0.00} / _{-0.50}	5.20 ^{+0.00} / _{-0.40}	5.10 ^{+0.00} / _{-0.50}	4.80 ±0.20
	D	4.00 ±0.30	14.50 ±0.30	14.00 ±0.30	15.70 ±0.40
	E	5.10 ^{+0.00} / _{-0.50}	4.70 ^{+0.00} / _{-0.50}	5.10 ^{+0.00} / _{-0.50}	4.80 ±0.20
	F	11.30 ±0.30	11.30 ±0.30	22.80 ±0.50	12.40 ±0.40

Core Set Parameters	C1(mm ⁻¹)	1.682	1.750	2.654	1.945
	Le(mm)	39.2	39.9	62.1	42.8
	Ae(mm ²)	23.3	22.8	23.4	22.0
	Ve(mm ³)	914	913	1450	942
	Ac(mm ²)	23.5	22.2	23.5	23.0
	Aw(mm ²)	51.6	56.7	104.0	67.5
	W(g/set)	4.7	4.5	7.2	4.6

Electrical Characteristics ⁽¹⁾⁽²⁾	AL value	PL-7	1300	1250	840	1100
		PL-9	1530	1480	1000	1300
		PL-11	1400	1300	900	1200
		PL-13	1630	1580	1070	1390
		PL-15	1400	1300	900	1200
		SM-23T	1250	1200	810	1100
		SM-43T	1940	1940	1330	1700
		SM-50	2250	2250	1550	2000
		SM-60	2700	2700	1860	2400
		SM-70S	2800	2800	2050	2600
	SM-100	3100	3100	2300	2900	
	Core loss	PL-7	0.50	0.50	0.80	0.52
		PL-9	0.46	0.46	0.73	0.47
		PL-11	0.46	0.46	0.73	0.47
		PL-13	0.44	0.44	0.70	0.45
		PL-15	0.41	0.41	0.65	0.42

Note : 1) Core Loss

- Unit : Watt max.
- Measuring conditions
- PL-7, PL-11, PL-15 : 100kHz, 200mT, at 100°C
- PL-9, PL-13 : 100kHz, 200mT, at 80°C

¹⁾ 100kHz, 100mT, at 100°C
²⁾ 25kHz, 200mT, at 100°C

2) AL value


- Unit : nH/N²
- Measuring conditions : 1kHz, 0.1V, 23°C
- Tolerance : ±25%
- SM-100 : Non mirror grinding

	EE2020A	EE2020S	EE2027S	EE2218S	EE2219S	EE2220S	EE2229S	EE2329S	EE2519S	
Type	EE	EE	EE	EE	EE	EE	EE	EE	EE	
Dimensions in mm	A	20.00 ^{+0.70} / _{-0.40}	20.40 ^{+0.00} / _{-0.80}	20.00 ±0.40	22.00 ±0.40	22.00 ±0.40	22.10 ±0.40	22.00 ±0.40	23.00 ±0.40	25.40 ±0.40
	B	20.40 ^{+0.00} / _{-0.80}	20.20 ^{+0.00} / _{-0.40}	27.30 ±0.50	18.90 ±0.40	18.60 ±0.40	19.80 ±0.30	29.40 ^{+0.00} / _{-0.80}	29.40 ^{+0.00} / _{-0.80}	19.05 ±0.40
	C	5.30 ^{+0.00} / _{-0.40}	5.90 ^{+0.00} / _{-0.40}	5.10 ^{+0.00} / _{-0.50}	6.00 ^{+0.00} / _{-0.60}	6.00 ^{+0.00} / _{-0.60}	5.00 ±0.25	6.00 ^{+0.00} / _{-0.50}	6.00 ^{+0.00} / _{-0.50}	6.35 ±0.30
	D	14.10 ±0.30	14.10 ±0.30	15.00 ±0.40	16.00 ±0.40	14.00 ±0.30	17.60 ±0.30	16.00 ±0.40	17.00 ±0.40	19.00 ±0.30
	E	5.90 ^{+0.00} / _{-0.30}	5.90 ^{+0.00} / _{-0.30}	5.10 ^{+0.00} / _{-0.50}	6.00 ^{+0.00} / _{-0.60}	6.00 ^{+0.00} / _{-0.60}	4.00 ±0.30	6.00 ^{+0.00} / _{-0.50}	6.00 ^{+0.00} / _{-0.50}	6.35 ±0.30
	F	14.00 ^{+0.60} / _{-0.00}	14.00 ^{+0.60} / _{-0.00}	22.80 ±0.50	10.90 ±0.30	10.60 ±0.30	15.20 ±0.30	21.40 ^{+0.00} / _{-0.80}	21.40 ^{+0.00} / _{-0.80}	12.70 ±0.30

C1(mm ⁻¹)	1.423	1.432	2.708	1.143	1.018	2.352	1.790	1.813	1.188
Le(mm)	43.4	46.1	63.1	42.3	40.2	50.8	63.9	64.9	48.0
Ae(mm ²)	30.5	32.2	23.3	37.0	39.5	21.6	35.7	35.8	40.4
Ve(mm ³)	1320	1480	1470	1565	1590	1100	2280	2320	1940
Ac(mm ²)	25.5	32.7	23.5	34.2	32.4	20.0	33.0	33.0	40.3
Aw(mm ²)	53.3	61.8	115.0	55.9	43.9	103.0	111.0	122.0	80.3
W(g/set)	7.2	7.5	7.2	8.3	8.6	5.5	11.7	12.1	10.6

Electrical Characteristics ⁽¹⁾⁽²⁾	AL value	PL-7	1550	1540	830	1900	2200	950	1300	1250	1900
		PL-9	1850	1830	1000	2300	2500	1100	1450	1400	2200
		PL-11	1600	1600	900	2000	2300	1000	1400	1300	2000
		PL-13	1970	1950	1070	2450	2670	1170	1550	1490	2350
		PL-15	1600	1600	900	2000	2300	1000	1400	1300	2000
		SM-23T	1500	1500	800	1800	2100	900	1200	1200	1800
		SM-43T	2400	2400	1300	2900	3300	1500	2100	2100	2900
		SM-50	2800	2800	1550	3380	3800	1800	2400	2400	3400
		SM-60	3360	3360	1860	4050	4560	2160	2880	2880	4080
		SM-70S	3600	3600	2050	4310	4850	2300	3300	3300	4450
	SM-100	4000	4000	2300	4700	5300	2500	3600	3600	4900	
	Core loss	PL-7	0.73	0.81	0.81	0.86	0.87	0.61	1.25	1.28	1.07
		PL-9	0.66	0.74	0.74	0.78	0.80	0.55	1.14	1.16	0.97
		PL-11	0.66	0.74	0.74	0.78	0.80	0.55	1.14	1.16	0.97
		PL-13	0.63	0.71	0.71	0.75	0.76	0.53	1.09	1.11	0.93
		PL-15	0.59	0.67	0.66	0.70	0.72	0.50	1.03	1.04	0.87

EE CORES

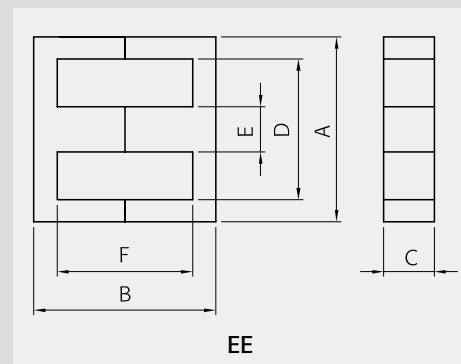

Part No.	EE2520S	EE2525F	EE2525S	EE2525W	
Type	EE	EE	EE	EE	
Dimensions in mm	A	25.00 ±0.40	25.0 ±0.75	24.50 ±0.40	25.05 ±0.75
	B	20.00 ±0.40	25.10 ±0.50	25.00 ±0.40	25.10 ±0.50
	C	6.55 ±0.30	7.20 ±0.30	7.00 ±0.30	10.75 ±0.30
	D	18.60 ±0.30	17.90 ±0.40	17.90 ±0.40	17.90 ±0.40
	E	6.55 ±0.30	7.20 ±0.25	7.30 ±0.20	7.25 ±0.25
	F	13.60 ±0.30	17.90 ±0.50	18.40 ±0.40	17.90 ±0.50

Core Set Parameters	C1(mm ⁻¹)	1.171	1.116	1.212	0.748
	Le(mm)	49.4	57.8	57.8	57.8
	Ae(mm ²)	42.2	51.8	47.7	77.3
	Ve(mm ³)	2080	2990	2760	4470
	Ac(mm ²)	42.9	52.1	51.1	77.9
	Aw(mm ²)	81.9	95.3	97.5	95.3
	W(g/set)	10.5	15.2	13.1	21.9

Electrical Characteristics ⁽¹⁾⁽²⁾	AL value	PL-7	1950	2100	1850	3150
		PL-9	2300	2350	2150	3500
		PL-11	2000	2200	1900	3300
		PL-13	2450	2510	2290	3730
		PL-15	2000	2200	1900	3300
		SM-23T	1900	2000	1800	3000
		SM-43T	3100	3400	2800	5000
		SM-50	3550	4000	3300	5800
		SM-60	4260	4800	3960	6960
		SM-70S	4450	4900	4300	7500
	SM-100	4900	5400	4700	8300	
	Core loss	PL-7	1.14	1.64	1.52	2.46
		PL-9	1.04	1.50	1.38	2.24
		PL-11	1.04	1.50	1.38	2.24
		PL-13	1.00	1.44	1.32	2.15
		PL-15	0.94	1.35	1.24	2.01

Note : 1) Core Loss

- Unit : Watt max.
- Measuring conditions
- PL-7, PL-11, PL-15 : 100kHz, 200mT, at 100°C
- PL-9, PL-13 : 100kHz, 200mT, at 80°C

¹⁾ 100kHz, 100mT, at 100°C
²⁾ 25kHz, 200mT, at 100°C

2) AL value


- Unit : nH/N²
- Measuring conditions : 1kHz, 0.1V, 23°C
- Tolerance : ±25%
- SM-100 : Non mirror grinding

	EE2532B	EE2532S	EE2722S	EE2821S	EE2821SC	EE2825S	EE2828S	EE2834S	EE3026A
Type	EE	EE	EE	EE	EE	EE	EE	EE	EE
A	25.30 ^{+0.50} _{-0.30}	25.30 ^{+0.50} _{-0.30}	27.00 ±0.50	28.00 ±0.40	28.50 ±0.50	28.00 ±0.50	28.40 ±0.40	28.00 ±0.40	30.00 ±0.50
B	31.60 ^{+0.60} _{-0.30}	32.00 ±0.40	22.00 ±0.40	21.00 ±0.50	20.90 ±0.40	25.50 ±0.60	28.40 ±0.40	34.60 ±0.40	26.00 ±0.50
C	6.35 ±0.25	7.00 ^{+0.00} _{-0.50}	11.00 ±0.50	11.50 ^{+0.00} _{-0.50}	10.90 ±0.30	10.60 ±0.20	10.70 ±0.30	11.00 ^{+0.00} _{-0.60}	10.00 ^{+0.00} _{-0.60}
D	19.30 ^{+0.40} _{-0.20}	19.30 ^{+0.40} _{-0.20}	19.20 min.	19.30 ±0.30	20.50 ±0.30	18.60 min.	20.40 ±0.40	18.60 min.	20.00 ±0.40
E	6.50 ^{+0.30} _{-0.25}	6.50 ^{+0.30} _{-0.25}	7.30 ±0.50	8.00 ±0.30	7.30 ±0.30	7.20 ±0.30	7.20 ±0.30	7.50 ^{+0.00} _{-0.60}	10.00 ^{+0.00} _{-0.60}
F	25.40 ±0.60	25.40 ±0.60	14.50 ±0.40	11.40 ±0.50	13.30 ±0.40	16.50 ±0.40	19.40 ±0.40	25.60 ±0.40	16.00 ±0.30

C1(mm ⁻¹)	1.847	1.747	0.654	0.492		0.664	0.763	0.868	0.603
Le(mm)	73.5	73.9	53.0	48.0	51.7	57.7	64.6	75.6	57.9
Ae(mm ²)	39.8	42.3	81.1	97.5	82.9	86.9	84.7	87.1	95.9
Ve(mm ³)	2930	3130	4297	4680	4290	5010	5470	6580	5550
Ac(mm ²)	41.4	44.0	84.3	89.1	79.5	76.3	77.0	77.0	94.0
Aw(mm ²)	163.0	164.0	86.1	64.4	87.7	98.1	128.0	151.0	82.4
W(g/set)	14.4	15.4	21.7	21.4	21.2	26.1	27.6	33.8	32.0

Electrical Characteristics ⁽¹⁾⁽²⁾	AL value	PL-7	1200	1300	3200	4350	3500	3300	3000	2600	3550
		PL-9	1400	1500	3700	5050	4050	3850	3400	3050	4150
		PL-11	1300	1400	3300	4500	3700	3400	3100	2700	3700
		PL-13	1490	1600	3940	5380	4320	4100	3620	3250	4420
		PL-15	1300	1400	3300	4500	3700	3400	3100	2700	3700
		SM-23T	1200	1200	3100	4200	3400	3200	2900	2500	3400
		SM-43T	2200	2300	5800	7700	6100	5700	5000	4400	6300
		SM-50	2500	2640	6720	8940	7060	6630	5770	5070	7300
		SM-60	3000	3170	8070	10730	8470	7950	6930	6090	8760
		SM-70S	3300	3440	9370	12460	9840	9230	8040	7070	10200
	SM-100	3600	3800	10300	13700	10800	10200	8800	7800	11200	
	Core loss	PL-7	1.61	1.72	2.36	2.57	2.36	2.76	3.01	3.62	3.42
		PL-9	1.47	1.57	2.15	2.34	2.15	2.51	2.74	3.29	3.11
		PL-11	1.47	1.57	2.15	2.34	2.15	2.51	2.74	3.29	3.11
		PL-13	1.41	1.50	2.06	2.25	2.06	2.40	2.63	3.16	2.98
		PL-15	1.32	1.41	1.93	2.11	1.93	2.25	2.46	2.96	2.79

EE CORES

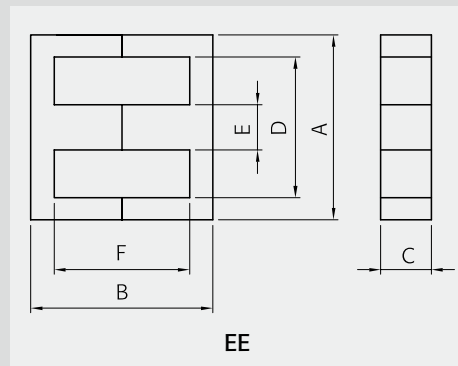

Part No.	EE3026S	EE3030A	EE3030S	EE3232S	
Type	EE	EE	EE	EE	
Dimensions in mm	A	30.00 ±0.50	30.00 ±0.50	30.00 ±0.50	32.10 ±0.80
	B	26.60 ±0.40	30.40 ±0.60	30.00 ±0.20	32.20 ±0.60
	C	10.70 ±0.30	11.80 ±0.30	7.10 ±0.20	9.15 ±0.20
	D	19.50 min.	22.30 min.	19.90 ±0.40	23.20 ±0.50
	E	10.70 ±0.30	7.20 ±0.30	6.90 ±0.30	9.20 ±0.30
	F	16.60 ±0.30	23.20 ±0.60	19.90 ±0.50	23.00 ±0.60

Core Set Parameters	C1(mm ⁻¹)	0.541	0.862	1.090	0.894
	Le(mm)	57.9	73.3	65.4	74.3
	Ae(mm ²)	107.0	85.0	60.0	83.1
	Ve(mm ³)	6210	6231	3920	6180
	Ac(mm ²)	114.0	85.0	48.9	84.1
	Aw(mm ²)	77.1	181.0	129.0	161.0
	W(g/set)	32.2	32	21.8	30.4

Electrical Characteristics ⁽¹⁾⁽²⁾	AL value	PL-7	4000	2400	2000	2400
		PL-9	4800	2800	2350	2850
		PL-11	4200	2600	2100	2500
		PL-13	5120	2980	2510	3040
		PL-15	4200	2600	2100	2500
		SM-23T	3800	2300		
		SM-43T	7000	4390		
		SM-50	8160	5100		
		SM-60	9790	6120		
		SM-70S	11300	7110		
	SM-100	12400	7800			
	Core loss	PL-7	3.42	3.43	2.16	3.40
		PL-9	3.11	3.12	1.96	3.09
		PL-11	3.11	3.12	1.96	3.09
		PL-13	2.98	2.99	1.88	2.97
		PL-15	2.79	2.80	1.76	2.78

Note : 1) Core Loss

- Unit : Watt max.
- Measuring conditions
- PL-7, PL-11, PL-15 : 100kHz, 200mT, at 100°C
- PL-9, PL-13 : 100kHz, 200mT, at 80°C

- ¹⁾ 100kHz, 100mT, at 100°C
- ²⁾ 25kHz, 200mT, at 100°C

2) AL value


- Unit : nH/N²
- Measuring conditions : 1kHz, 0.1V, 23°C
- Tolerance : ±25%
- SM-100 : Non mirror grinding

	EE3327S	EE3528S	EE3529S	EE3530S	EE3549S	EE3643S	EE4035S	EE4133B	EE4133N
Type	EE	EE	EE	EE	EE	EE	EE	EE	EE
A	33.40 ±0.50	34.60 ±0.50	34.70 ±0.40	35.00 ±0.50	35.00 ±0.50	36.00 ±0.70	40.00 ^{+0.70} / _{-0.50}	41.50 ±0.80	41.50 ±0.80
B	27.40 ^{+1.00} / _{-0.00}	28.60 ±0.60	28.75 ±0.40	30.20 ±0.50	48.80 ±0.40	43.10 ±0.40	34.50 ^{+0.80} / _{-0.20}	33.00 ±0.40	34.00 ±0.40
C	13.00 ^{+0.00} / _{-0.60}	9.30 ±0.30	9.20 ^{+0.25} / _{-0.30}	12.00 ^{+0.00} / _{-0.50}	10.00 ±0.30	11.75 ±0.25	12.00 ^{+0.00} / _{-0.70}	12.70 ±0.25	12.70 ±0.25
D	24.60 ±0.40	25.60 ±0.50	25.40 ±0.40	25.00 ±0.40	24.50 min.	25.10 ±0.60	27.50 ^{+0.70} / _{-0.00}	28.80 min.	29.00 min.
E	10.00 ^{+0.00} / _{-0.60}	9.40 ±0.25	9.40 ±0.20	10.30 ^{+0.00} / _{-0.50}	10.00 ±0.30	9.95 ±0.25	12.00 ^{+0.00} / _{-0.70}	12.50 ±0.20	12.50 ±0.20
F	18.80 ^{+1.00} / _{-0.00}	19.60 ±0.50	19.25 ±0.40	18.20 ±0.30	36.60 ±0.40	32.10 ±0.60	20.40 ^{+0.20} / _{-0.40}	20.80 ±0.40	21.20 ±0.40

C1(mm ⁻¹)	0.591	0.822	0.804	0.551	1.000	0.780	0.524	0.509	0.503
Le(mm)	67.4	69.7	69.3	68.3	104.0	96.0	77.1	77.6	79.0
Ae(mm ²)	114.0	84.8	86.2	124.0	104.0	123.0	147.0	152.5	157.0
Ve(mm ³)	7690	5910	5970	8500	10900	11870	11370	11825	12470
Ac(mm ²)	123.0	87.4	86.2	118.0	100.0	116.0	135.0	158.0	158.0
Aw(mm ²)	143.0	158.0	154.0	136.0	270.0	243.0	164.0	177.8	180.0
W(g/set)	39	29.5	30.4	42.9	56	60	60	63	63

AL value	PL-7	3700	2600	2850	4000	2200	2850	4000	4200	4200
	PL-9	4300	3100	3250	4700	2600	3300	4800	4800	4900
	PL-11	3900	2700	3000	4200	2300	3000	4200	4300	4400
	PL-13	4580	3300	3460	5010	2770	3520	5120	5120	5220
	PL-15	3900	2700	3000	4200	2300	3000	4200	4300	4400
Core loss	PL-7	4.23	3.25	3.28	4.68	6.00	6.53	6.25	6.50	6.86
	PL-9	3.85	2.96	2.99	4.25	5.45	5.94	5.69	5.91	6.24
	PL-11	3.85	2.96	2.99	4.25	5.45	5.94	5.69	5.91	6.24
	PL-13	3.69	2.84	2.87	4.08	5.23	5.70	5.46	5.68	5.99
	PL-15	3.46	2.66	2.69	3.83	4.91	5.34	5.12	5.32	5.61

EE CORES

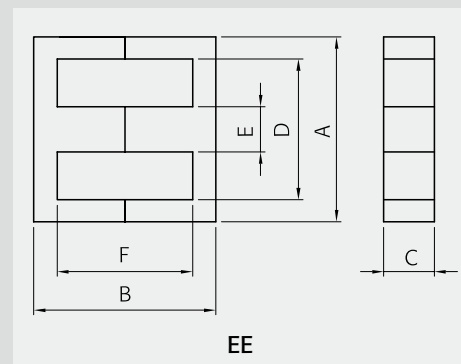

Part No.	EE4133S	EE4242B	EE4242S	EE5040S	
Type	EE	EE	EE	EE	
Dimensions in mm	A	41.28 ±0.80	42.00 ^{+1.00} _{-0.70}	42.00 ^{+1.00} _{-0.70}	50.15 ^{+0.70} _{-0.50}
	B	33.52 ±0.40	42.40 ±0.40	42.40 ±0.40	41.90 ±0.50
	C	12.70 ±0.25	15.00 ±0.30	20.00 ^{+0.00} _{-0.80}	15.70 ^{+0.00} _{-0.50}
	D	28.01 min.	29.50 ^{+1.20} _{-0.00}	29.50 ^{+1.20} _{-0.00}	33.00 ±0.50
	E	12.70 ±0.25	12.20 ^{+0.00} _{-0.50}	12.20 ^{+0.00} _{-0.50}	15.70 ^{+0.00} _{-0.50}
	F	20.82 ±0.40	30.00 ^{+0.80} _{-0.00}	30.00 ^{+0.80} _{-0.00}	24.90 ±0.50

Core Set Parameters	C1(mm ⁻¹)	0.480	0.550	0.416	0.367
	Le(mm)	77.5	97.9	97.8	93.3
	Ae(mm ²)	161.3	178.0	235.0	254.0
	Ve(mm ³)	12501	17510	23000	23790
	Ac(mm ²)	151.8	176.0	234.0	238.0
	Aw(mm ²)	164.6	278.0	275.0	218.0
	W(g/set)	64	88	116	121

Electrical Characteristics ⁽¹⁾⁽²⁾	Al value	PL-7	4400	3800	5000	5800
		PL-9	5100	4500	6000	6800
		PL-11	4600	4000	5200	6000
		PL-13	5440	4800	6400	7250
		PL-15	4600	4000	5200	6000
	Core loss	PL-7	6.88	9.63	12.65	1.89 ²⁾
		PL-9	6.25	8.76	11.50	1.70 ²⁾
		PL-11	6.25	8.76	11.50	1.70 ²⁾
		PL-13	6.00	8.40	11.04	1.70 ²⁾
		PL-15	5.63	7.88	10.35	1.53 ²⁾

Note : 1) Core loss

- Unit : Watt max.
- Measuring conditions
- PL-7, PL-11, PL-15 : 100kHz, 200mT, at 100°C
- PL-9, PL-13 : 100kHz, 200mT, at 80°C
- ¹⁾ 100kHz, 100mT, at 100°C
- ²⁾ 25kHz, 200mT, at 100°C

2) Al value

- Unit : nH/N²
- Measuring conditions : 1kHz, 0.1V, 23°C
- Tolerance : ±25%
- SM-100 : Non mirror grinding

	EE5555A	EE5555S	EE6565S	EE7066A	EE7166S	EE8076S
Type	EE	EE	EE	EE	EE	EE
A	55.15 ±1.05	55.15 ±1.05	65.15 ±1.35	70.00 ±1.00	70.50 ±1.00	80.00 ±0.80
B	55.00 ±0.60	55.00 ±0.60	65.00 ±0.60	33.00 ±0.20	33.20 ^{+0.00} _{-0.50}	76.10 ±0.40
C	21.00 ^{+0.00} _{-0.80}	24.70 ±0.30	27.00 ±0.40	31.60 ±0.50	31.60 ±0.40	20.00 ±0.40
D	38.10 ±0.60	38.10 ±0.60	45.10 ±0.90	48.60 ±0.70	48.50 ±0.50	60.00 ±0.60
E	16.95 ±0.25	16.95 ±0.25	19.65 ±0.35	21.50 ±0.40	21.60 ±0.30	20.00 ±0.40
F	37.60 ±0.60	37.60 ±0.60	45.20 ±0.80	22.20 ±0.20	21.90 ^{+0.70} _{-0.00}	56.10 ±0.60

C1(mm ⁻¹)	0.349	0.291	0.275	0.220	0.218	0.475
Le(mm)	123.0	123.0	147.0	149.7	149.0	189.8
Ae(mm ²)	352.0	422.0	535.0	679.2	683.0	400.0
Ve(mm ³)	43470	52130	78700	101683	102000	75920
Ac(mm ²)	349.0	418.0	530.0	679.4	701.0	400.0
Aw(mm ²)	397.0	397.0	575.0	601.6	550.0	1122.0
W(g/set)	219	263	398	490	490	379

Electrical Characteristics ⁽¹⁾⁽²⁾	Al value	PL-7	6000	7200	8000	9500	9500	4500
		PL-9	7100	9000	9600	11500	11500	5200
		PL-11	6300	6300	8000	10000	10000	4700
		PL-13	8500	9000	10000	12500	12500	5540
		PL-15	6300	6300	8000	10000	10000	4700
	Core loss	PL-7	3.75 ¹⁾	5.00 ¹⁾	6.30 ²⁾	10.20 ¹⁾	10.30 ¹⁾	6.60 ²⁾
		PL-9	3.30 ¹⁾	4.50 ¹⁾	5.70 ²⁾	9.20 ¹⁾	9.30 ¹⁾	6.00 ²⁾
		PL-11	3.30 ¹⁾	4.50 ¹⁾	5.70 ²⁾	9.20 ¹⁾	9.30 ¹⁾	6.00 ²⁾
		PL-13	3.30 ¹⁾	4.50 ¹⁾	5.70 ²⁾	9.20 ¹⁾	9.30 ¹⁾	6.00 ²⁾
		PL-15	3.10 ¹⁾	4.20 ¹⁾	5.30 ²⁾	8.60 ¹⁾	8.70 ¹⁾	5.60 ²⁾