



HSF

NOTES:
 Rated Current:1.0A
 Rated Voltage:100V
 Contact Resistance:20mΩ max
 Withstand Voltage:250V AC/minute
 Insulation Resistance:100MΩ min
 Operation Temperature:-25℃ to +85℃

Contact Material:Brass
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0

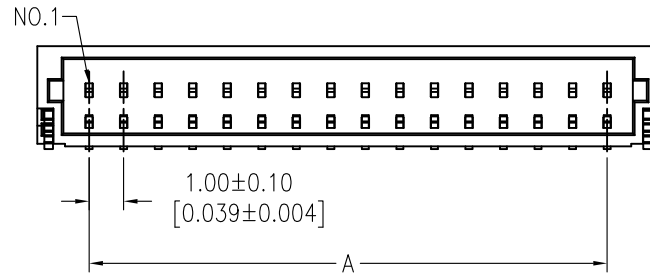


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

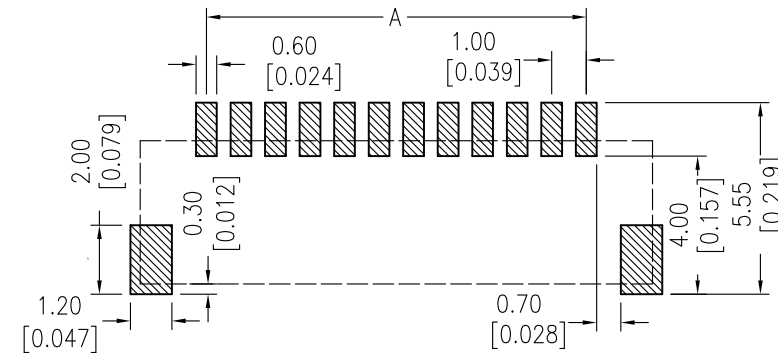

Ordering Information

WF1001 - WZ XX X X 1

No. of pins: 02-20P
 Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
 Color: B=Black, T=Natural, W=White, N=Brown
 Packing: T=Tube, R=Reel

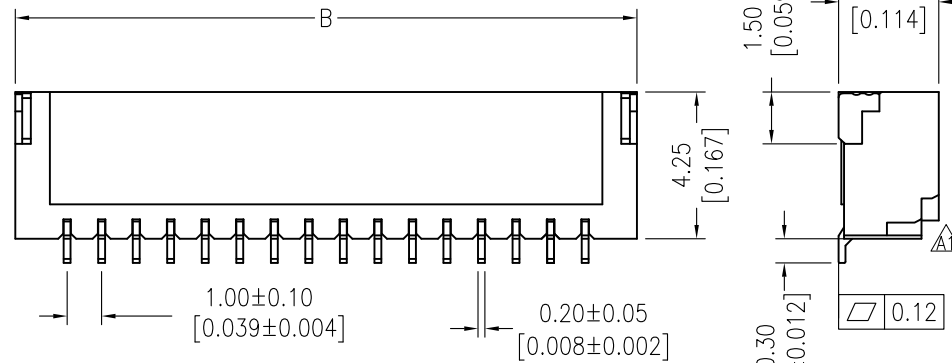

Specification & Ordering Information:

Circuit	Part No.	Dimension		TUBE PCS	REEL/PCS
		A	B		
02	WF1001-WZ02XX1	1.0	4.0	136	1,000/1,500
03	WF1001-WZ03XX1	2.0	5.0	110	1,000/1,500
04	WF1001-WZ04XX1	3.0	6.0	91	1,000/1,500
05	WF1001-WZ05XX1	4.0	7.0	79	1,000/1,500
06	WF1001-WZ06XX1	5.0	8.0	69	1,000/1,500
07	WF1001-WZ07XX1	6.0	9.0	61	1,000/1,500
08	WF1001-WZ08XX1	7.0	10.0	55	1,000/1,500
09	WF1001-WZ09XX1	8.0	11.0	50	1,000/1,500
10	WF1001-WZ10XX1	9.0	12.0	46	1,000/1,500
11	WF1001-WZ11XX1	10.0	13.0	42	1,000/1,500
12	WF1001-WZ12XX1	11.0	14.0	39	1,000/1,500
13	WF1001-WZ13XX1	12.0	15.0	37	1,000/1,500
14	WF1001-WZ14XX1	13.0	16.0	34	1,000/1,500
15	WF1001-WZ15XX1	14.0	17.0	32	1,000/1,500
16	WF1001-WZ16XX1	15.0	18.0	31	1,000/1,500
17	WF1001-WZ17XX1	16.0	19.0	29	1,000/1,500
18	WF1001-WZ18XX1	17.0	20.0	28	1,000/1,500
19	WF1001-WZ19XX1	18.0	21.0	26	1,000/1,500
20	WF1001-WZ20XX1	19.0	22.0	25	1,000/1,500

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40	2013/08/13	UNIT	mm	SEE TAB
A1	2013/08/13	Modify		X.XX	±0.25	DATE	SIZE	A4	TITLE:
A0	2012/09/01	NEW		X.XXX	±0.15	DATE	SHEET	1/1	"J" TYPE 1.00 WAFER 90° SMT
				Angle	± 3'	DATE	PROJ.		Customer NO.
				DIM	TOL				