

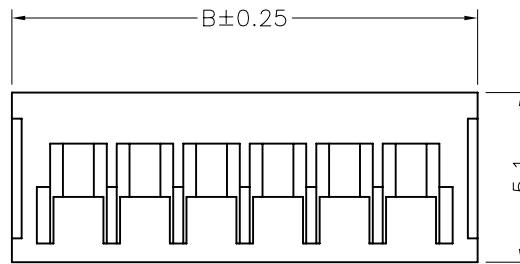


# HSF

NOTES:  
 Rated Current:1.0A  
 Rated Voltage:100V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:250V AC/Minute  
 Insulation Resistance:500MΩ min  
 Operation Temperature:-25℃ to+85℃  
 Material:PA66 UL94V-0

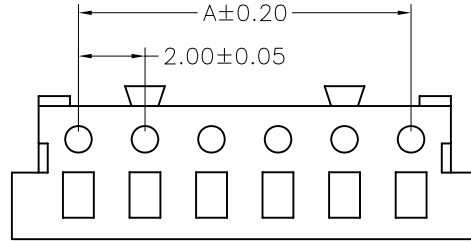

Dimensional & Ordering Information

Circuit	Part No.	Dimension		
		A	B	C
02	WF2006-H02X01	2.00	6.00	2.8
03	WF2006-H03X01	4.00	8.00	4.8
04	WF2006-H04X01	6.00	10.00	6.8
05	WF2006-H05X01	8.00	12.00	8.8
06	WF2006-H06X01	10.00	14.00	10.8
07	WF2006-H07X01	12.00	16.00	12.8
08	WF2006-H08X01	14.00	18.00	14.8
09	WF2006-H09X01	16.00	20.00	16.8
10	WF2006-H10X01	18.00	22.00	18.8
11	WF2006-H11X01	20.00	24.00	20.8
12	WF2006-H12X01	22.00	26.00	22.8
13	WF2006-H13X01	24.00	28.00	24.8
14	WF2006-H14X01	26.00	30.00	26.8
15	WF2006-H15X01	28.00	32.00	28.8

## Ordering Information

WF2006 - H XX X 0 1

No. of pins  
02P~15P

Color  
E=Beige  
W=White  
B=Black  
N=Brown

Packing  
0=PE Bag

						OPERATION	DRAW	WEIXD	08/08/04	SCALE	1:1	
						X.X	±0.25			UNIT	mm	
						X.XX	±0.15	DESIGN		SIZE	A4	
						X.XXX	±0.10	CHECK		SHEET	1/1	
A0	08/08/04	NEW				Angle	± 3'	APPROVE		PROJ.	☉	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL					