
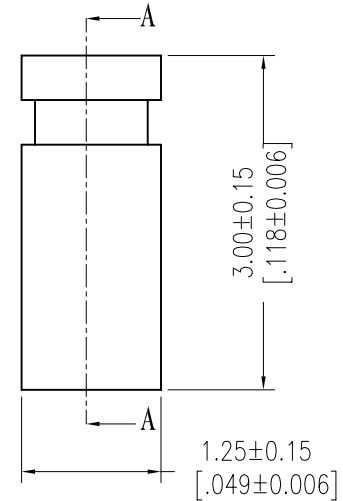


HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 100V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PBT+30%G.F UL94V-0

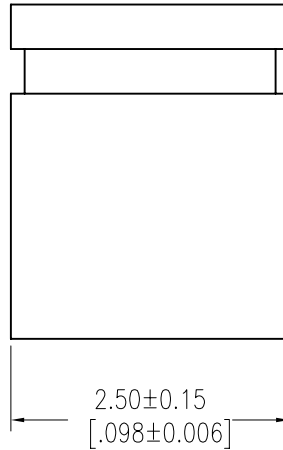


Ordering Information

3712 - 30 01 C S0 X 0 1


Housing shape
C=close

S0=Gold Flash/Ni

Colour
 B=Black (Std)
 R=Red
 Y=Yellow
 N=Green
 U=Blue



1.27±0.10
[0.050±0.004]

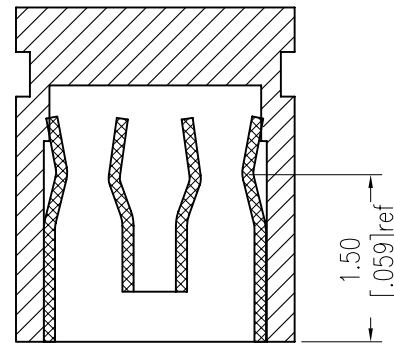

SECTION A-A

| | | | | | | | | | |
|-----|------------|--------------------------|--------|-------------|---------|------------|-------|-----|-------------------------------|
| | | | | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
| | | | | X.X ±0.40 | JYHuang | 2012/12/10 | UNIT | mm | 3712-3001CXXX01 |
| | | | | X.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: |
| | | | | X.XXX ±0.15 | | | SHEET | 1/1 | 1.27mm MINI JUMPER CLOSE TYPE |
| A0 | 2012/12/10 | NEW | ----- | Angle ± 3' | APPROVE | DATE | PROJ. | ☉ | Customer NO. |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM TOL | | | | | |